


ASSEMBLY INSTRUCTIONS

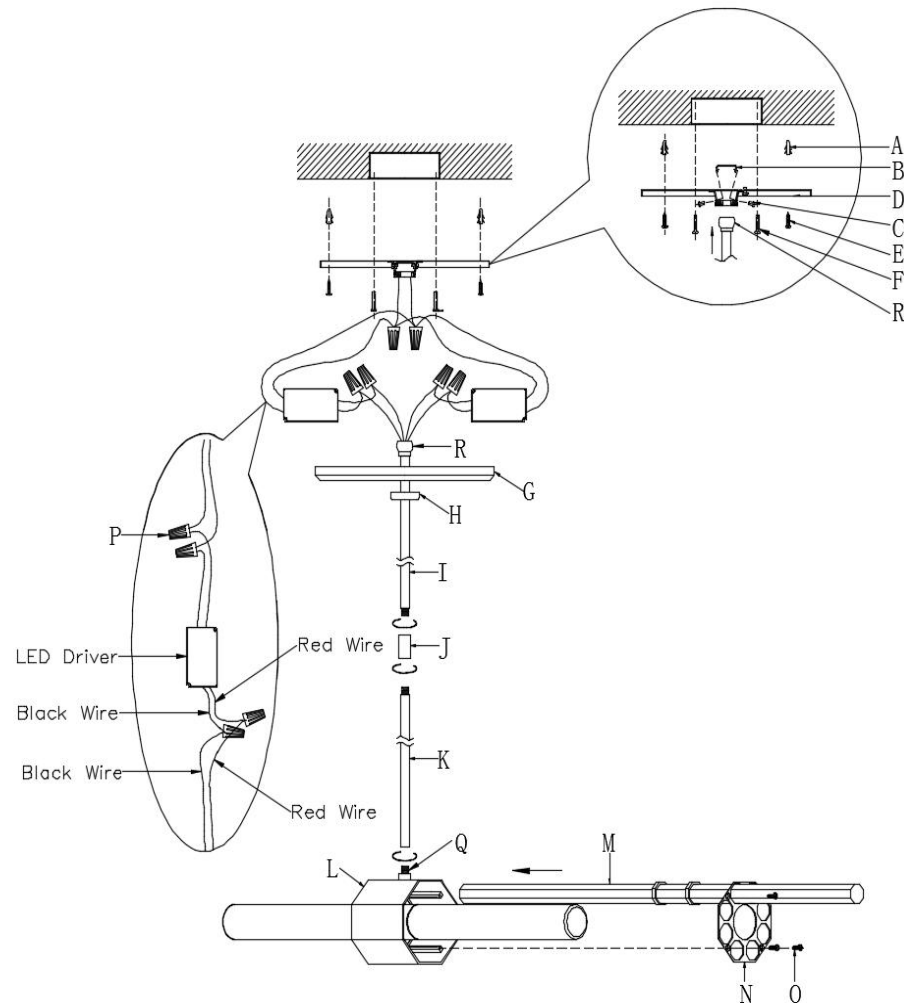

Fascio Medium Linear Chandelier

Item# LR 5910

WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.

WARNING***SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.

INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL.

IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT. DO NOT INSTALL.

ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.

NOTE: CAREFULLY UNPACK EACH PIECE IN TOP LAYER OF PACKING PRIOR TO REMOVING.


RETAIN ALL PACKING MATERIAL UNTILL INSPECTION AND INSTALLATION ARE FINAL.

1. Carefully remove all parts from the box.
 2. Remove the mounting plate (D) from the canopy (G) by loosening lock collar(H).
 3. Drill 2 holes on the ceiling and make sure the hole distance will match to the mounting plate(D) hole exactly, then knock the anchors(A) to the ceiling holes.
 4. Install the mounting plate(D) to the ceiling and secure with mounting screw(E)and ball screw(F).
 5. Feed wire through the rod(K),break(J),rod(I),lock collar(H),canopy(G) and swivel ball(R).
 6. Thread the bottom nipple of rod(K) into break(J).
 7. Thread the top nipple of rod(K) into break(J). Thread the bottom nipp of rod(I) into break(J).
 8. Slide the lock collar(H) and canopy(G) through down the rod(I).
 9. Measure the wires and cut it to desired length. Be sure to be enough for connection to LED driver input supply wire.
 10. Hook the swivel ball(R) to mounting loop for hanging the light fixture(L) and secure with screw(C) tightly.
 11. Connect the two LED drivers input supply wire Neutral wire(white) with the neutral wire from the outlet box using a wire nut.Connect the LED driver input Hot(black)wire with the hot wire(black) from the outlet box using a wire nut.
 12. Connect the two LED drivers output supply wire to the wires from the fixture body using a wire nut, please note red wire(+) to red wire, and black wire(-) to black wire.
- DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OTHERWISE SAFETY WILL BE COMPROMISED.
13. Tuck the wire connections neatly into ceiling outlet box.
 14. Slip canopy(G) to mounting plate(D) and secure with lock collar(H).
 15. Insert all the crystals(M) to the holes of fixture(L). Put the octagonal ring(N) through the crystals and secure with the screw(O).
 16. Installation is completed, turn on power at fuse or circuit breaker.

*** Clean with a dry, soft cloth only. Use no harsh abrasives or chemical agents.



ASSEMBLY INSTRUCTIONS

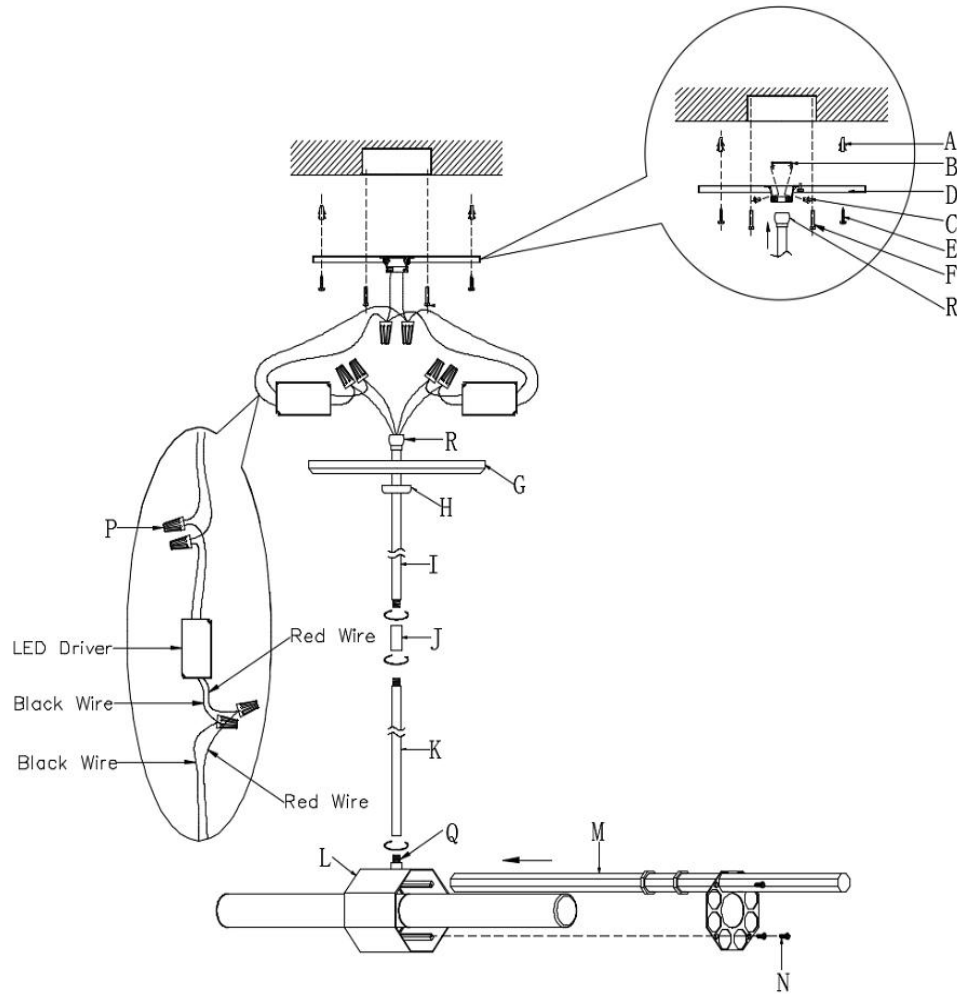

Fascio Medium Linear Chandelier

Item# LR 5910

WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.
WARNING*SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.**

INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL.

IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT. DO NOT INSTALL.

ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.

NOTE: CAREFULLY UNPACK EACH PIECE IN TOP LAYER OF PACKING PRIOR TO REMOVING.
 RETAIN ALL PACKING MATERIAL UNTILL INSPECTION AND INSTALLATION ARE FINAL.

1. Carefully remove all parts from the box.
2. Remove the mounting plate (D) from the canopy (G) by loosening lock collar(H).
3. Drill 2 holes on the ceiling and make sure the hole distance will match to the mounting plate(D) hole exactly, then knock the anchors(A) to the ceiling holes.
4. Install the mounting plate(D) to the ceiling and secure with mounting screw(E)and ball screw(F).
5. Feed wire through the rod(K),break(J),rod(I),lock collar(H),canopy(G) and swivel ball(R).
6. Thread the bottom nipple of rod(K) into break(J).
7. Thread the top nipple of rod(K) into break(J). Thread the bottom nipp of rod(I) into break(J).
8. Slide the lock collar(H) and canopy(G) through down the rod(I).
9. Measure the wires and cut it to desired length. Be sure to be enough for connection to LED driver input supply wire.
10. Removing the metal piece from mounting plate(D) by Looseing the screws(C).Hook the swivel ball(R) to mounting loop for hanging the light fixture(L),then put down the metal piece to the swivel ball(R) and secure with screw(C) tightly.
11. Put the ground wire from ceiling outlet box through the center hole of mounting plate(D). Wrap the ground wire onto the green ground screw on mounting plate(D) and secure tightly.
 IT IS IMPERATIVE THAT THIS FIXTURE BE GROUNDED.
12. Connect the two LED drivers input supply wire Neutral wire(white) with the neutral wire from the outlet box using a wire nut.Connect the Hot(black)wire with the hot wire from the outlet box using a wire nut.
13. Connect the two LED drivers output supply wire to the wires from the fixture body using a wire nut, please note red wire(+) to red wire, and black wire(-) to black wire.
 DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OTHERWISE SAFETY WILL BE COMPROMISED.
14. Tuck the wire connections neatly into ceiling outlet box.
15. Slip canopy(G) to mounting plate(D) and secure with lock collar(H).
16. Insert all the crystals(M) to the holes of fixture(L). Put the octagonal ring(N) through the crystals and secure with the screw(O).
17. Installation is completed, turn on power at fuse or circuit breaker.

*** Clean with a dry, soft cloth only. Use no harsh abrasives or chemical agents.



VISUAL COMFORT & Co. Est. 1987