


ASSEMBLY INSTRUCTIONS

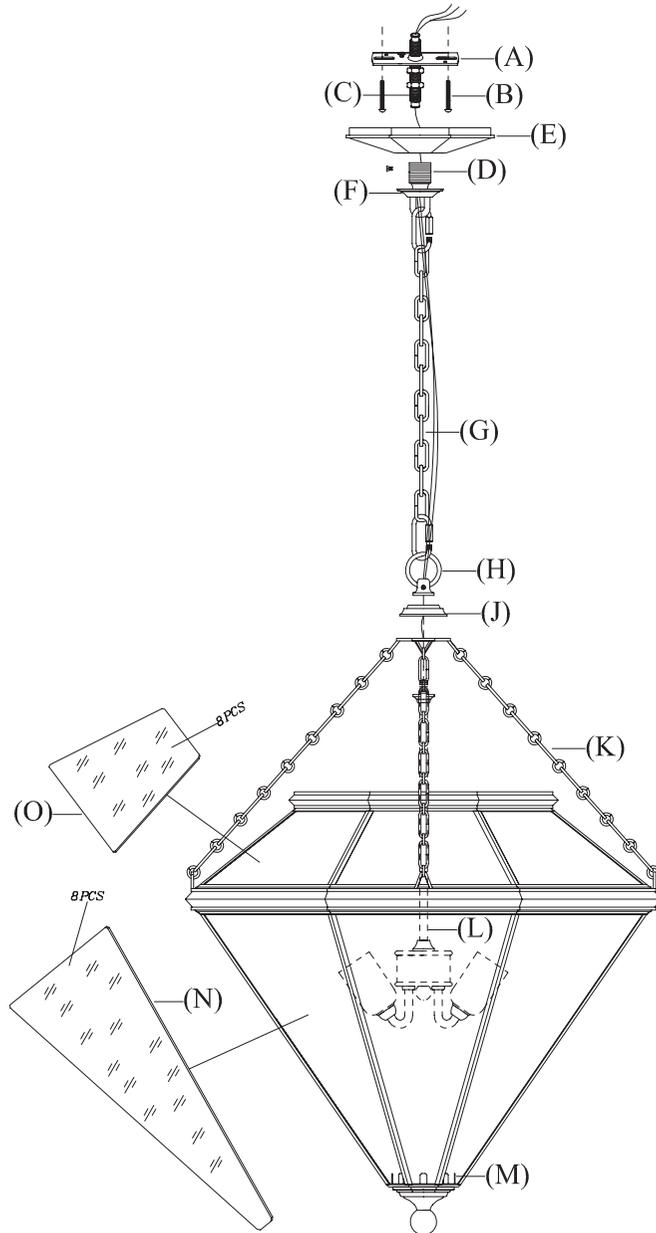

Cannes Pendant

Item # RL 5060


NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

1. To install glass panels (N) provided to each frame, make sure metal tabs (M) are flipped against opening of the frame. Place glass panels (N) to each frame, secure the glass panels (N) by bending back the metal (M) tabs towards the glass panels (N).
2. Repeat step 1 to install glass panels (O).
3. Attach assembly part (L) and lantern box (K) pass through the hole of (J) to bottom of top loop (H). Tighten by hand.
4. Attach chain (G) to top loop (H) on lantern box.
5. Feed wire through chain (G), chain mounting loop (D), canopy (E) and nipple (C).
6. Slide canopy (E) and canopy ring (F) on chain (G).
7. Attach mounting strap (A) to ceiling outlet box and secure with mounting screws (B).
8. Insert top thread nipple (C) in mounting strap (A).
9. Attach chain mounting loop (D) to thread nipple (C).
10. Attach chain (G) with fixture to chain mounting loop (D) at desired height.
11. Attach the ground wire (bare wire) from the fixture to the ground junction box wire (usually green or copper wire). Fasten together with a plastic wire connector and wrap the connection with electrical tape. Be sure no wire strands are exposed.
12. Connect the neutral wire from the fixture (ridges molded wire) to the neutral wire from the junction box (usually white). Fasten together with a plastic wire connector and wrap the connection with electrical tape. Be sure no wire strands are exposed.

RALPH LAUREN

ASSEMBLY INSTRUCTIONS

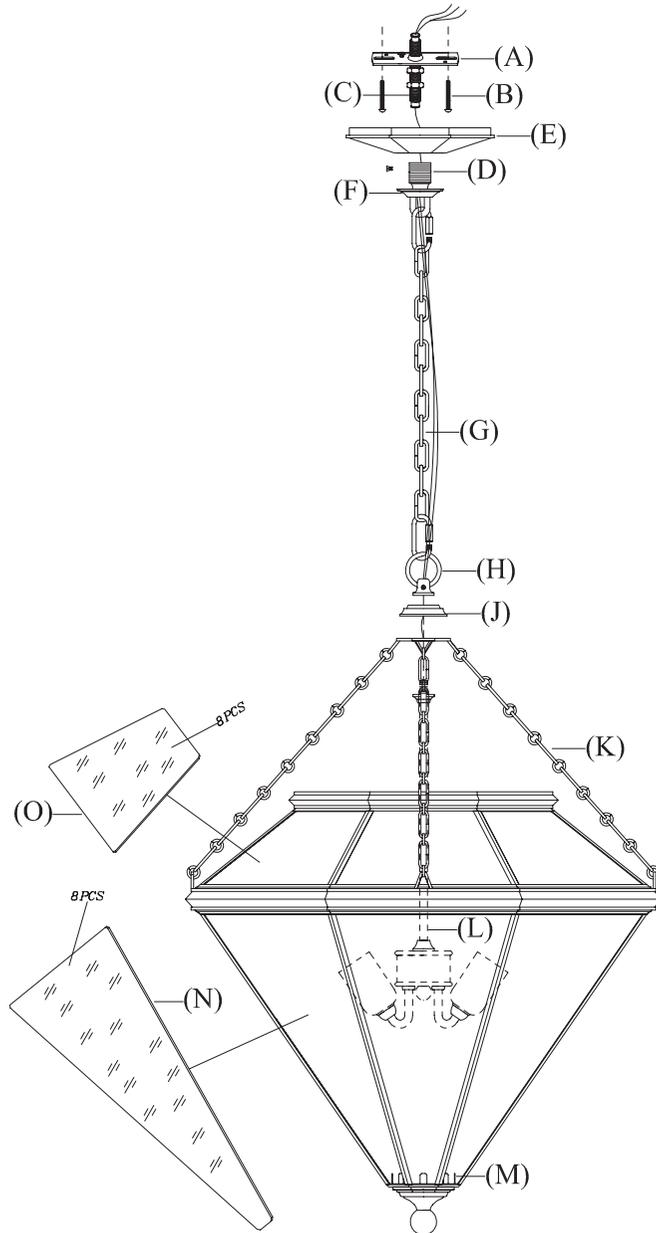

Cannes Pendant

Item # RL 5060

NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

13. Connect the hot wire from the fixture (smooth wire) to the hot wire (usually black) from the junction box. Fasten each together with a plastic wire connector and wrap the connection with electrical tape. Be sure that no wire strands are exposed.
DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OTHERWISE SAFETY WILL BE COMPROMISED.
14. Tuck the wire connections neatly into the ceiling outlet box.
15. Slip canopy (E) to ceiling and secure with threaded canopy ring (F).
16. Insert light bulbs (not included) into the sockets.
17. Restore power and test fixture. Enjoy your ceiling fixture.

are Instructions: Clean only with a soft dry cloth or feather duster. Do not use abrasive or chemical agents.

RALPH LAUREN