


## ASSEMBLY INSTRUCTIONS

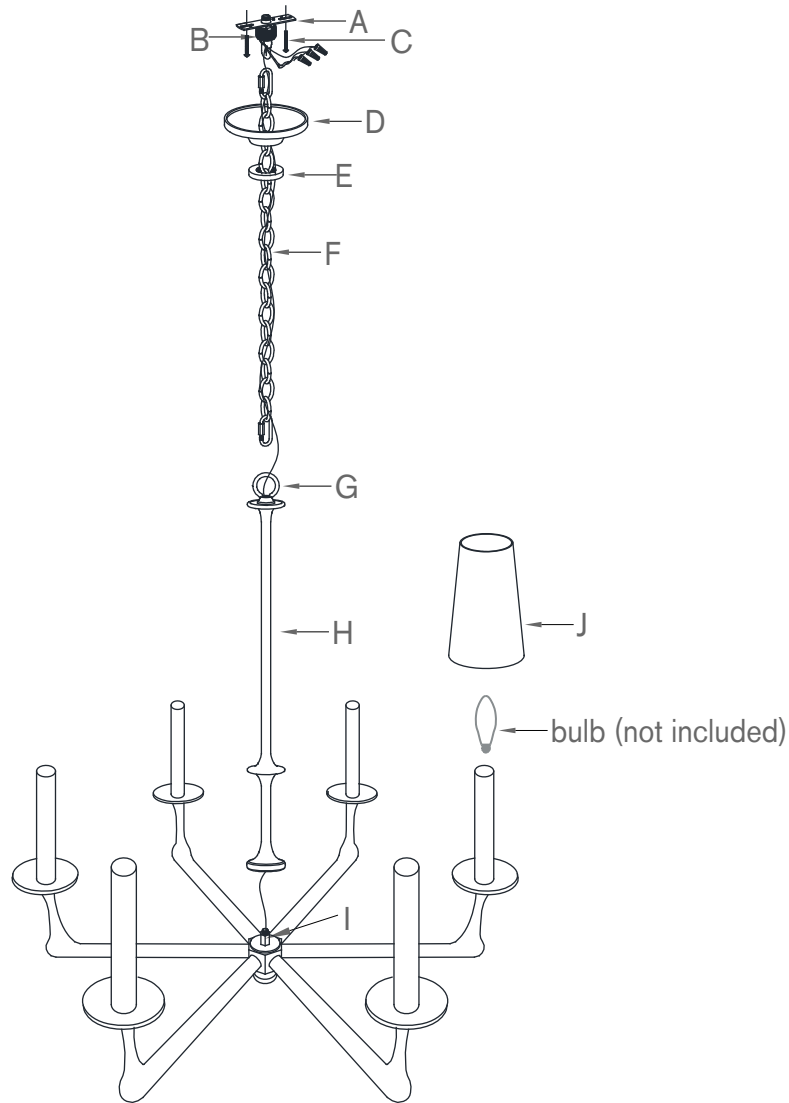

### Gabriel Medium Chandelier Item # CHC 5315

**WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.**

**WARNING \*\*\* SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.**

**INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT, DO NOT INSTALL.**

**ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.**

1. Carefully remove all parts from the carton.
2. Feed wire through connection rod (H) and chain (F).
3. Thread connection rod (H) onto the joint (I) by turning in a clockwise direction until tight.
4. Attach chain (F) to top loop (G) and mounting loop (C) by opening/closing end link of chain.
5. Unscrew collar ring (E), slide collar ring (E) and canopy (D) on chain (F).
6. Attach mounting strap (A) to ceiling outlet box and secure with mounting screws (B).
7. Attach the bare copper ground from the fixture to the ground junction box wire (usually green or copper), fasten together with a plastic wire connector. Tightly wrap the wire connector with electrical tape. Be sure no wire strands are exposed. **IT IS IMPERATIVE THAT THE OUTLET BOX IN YOUR HOME BE PROPERLY GROUNDED.**
8. Connect neutral wire from fixture (ribbed molded wire) to the neutral wire from the junction box (usually white). Fasten both wires together with a plastic wire connector and tightly wrap the wire connector with electrical tape. Be sure no wire strands are exposed.
9. Connect the hot wires from the fixture (smooth wire) to the hot wire (usually black) from the junction box, fasten both wires together with a plastic wire connector. Tightly wrap the wire connector with electrical tape. **DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OTHERWISE SAFETY WILL BE COMPROMISED.**
10. Tuck the wire connections neatly into the ceiling outlet box.
11. Slip canopy (D) flush to ceiling and secure with collar ring (E).
12. Insert light bulbs (not included) into the sockets.
13. Clip shades (J) onto the light bulbs.
14. Installation is complete. Restore power and test fixture.

\*\*\* Clean with a dry, soft cloth only. Use no harsh abrasives or chemical agents.