


ASSEMBLY INSTRUCTIONS

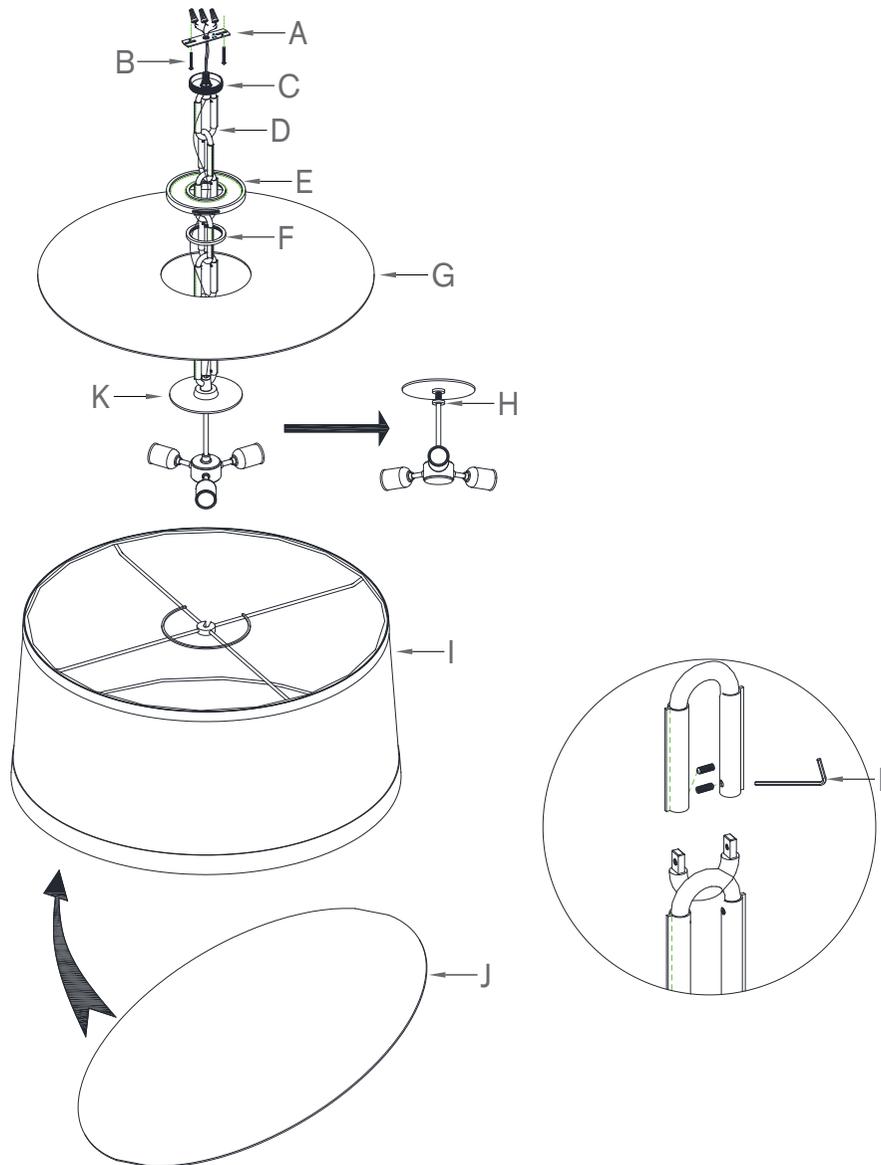

Cody Medium Hanging Shade

Item # RL 5533

NOTICE:


This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

1. Carefully remove all parts from the carton.
2. Place shade cover (G) on top of socket assembly (K).
3. Unscrew canopy ring (F), slide canopy ring (F) and canopy (E) on chain (D).
4. Feed the wires through the chain (D), canopy ring (F), canopy (E) and mounting loop (C).
5. Screw mounting strap (A) onto the center nipple on mounting loop (C) by turning in a clockwise direction until tight.
6. Attach mounting strap (A) with light fixture to ceiling outlet box and secure with mounting screws (B) provided.
7. Attach the bare copper ground from the fixture to the ground junction box wire (usually green or copper), fasten together with a plastic wire connector. Tightly wrap the wire connector with electrical tape. Be sure no wire strands are exposed. **IT IS IMPERATIVE THAT THE OUTLET BOX IN YOUR HOME BE PROPERLY GROUNDED.**
8. Connect neutral wire from fixture (ribbed molded wire) to the neutral wire from the junction box (usually white). Fasten both wires together with a plastic wire connector and tightly wrap the wire connector with electrical tape. Be sure no wire strands are exposed.
9. Connect the hot wires from the fixture (smooth wire) to the hot wire (usually black) from the junction box. Fasten both wires together with a plastic wire connector and wrap the connection with electrical tape. **DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OTHERWISE SAFETY WILL BE COMPROMISED.**
10. Tuck the wire connections neatly into the ceiling outlet box.

RALPH LAUREN



ASSEMBLY INSTRUCTIONS

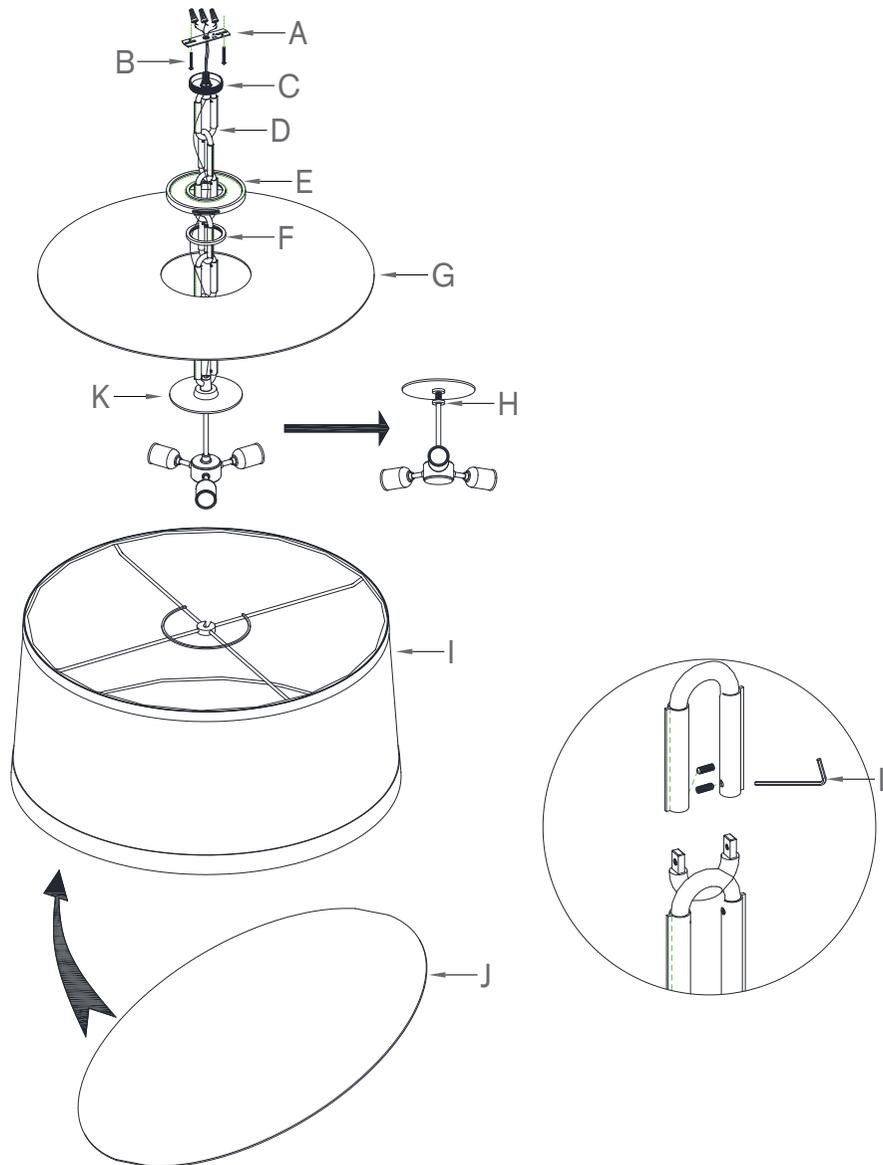

Cody Medium Hanging Shade

Item # RL 5533

NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

11. Slip canopy (E) to the affixed mounting strap (A) and secure with canopy ring (F).
12. Attach shade (K) to the stem of socket assembly (K) and secure by tighten the lock ring (H).
13. Insert diffuser (J) into the bottom of shade (I).
14. Lift the shade cover (G), insert light bulbs (not included) into sockets.
15. Restore power and test fixture. Installation is complete.

TO ADJUST THE HEIGHT:

1. Separate the chain by removing the inner screws using Allen wrench (L).
2. Adjust the hanging height by adding more chains or removing some chains.
3. Retighten the chain by tightening the inner screws using Allen wrench (L).

Care Instructions: Clean only with a soft dry cloth or feather duster. Do not use abrasive or chemical agents.

RALPH LAUREN

